


# PRODUCT DATA SHEET

## COOL38 TOPMOUNTED 2D

The Cool38 TopMounted 2D is a two door, fixed bulkhead. Each door can be stowed independently of the other. The doors are manually positioned to the roof with a loop and hook attached to a fixed point in your trailer. The stainless steel TopMounted trolleys run through LoadLok 3060 J-track (track not included) and allows the two doors, as one bulkhead, to be easily and quickly repositioned over the length of the trailer.

The Cool38 TopMounted will be delivered according to trailer specifications.

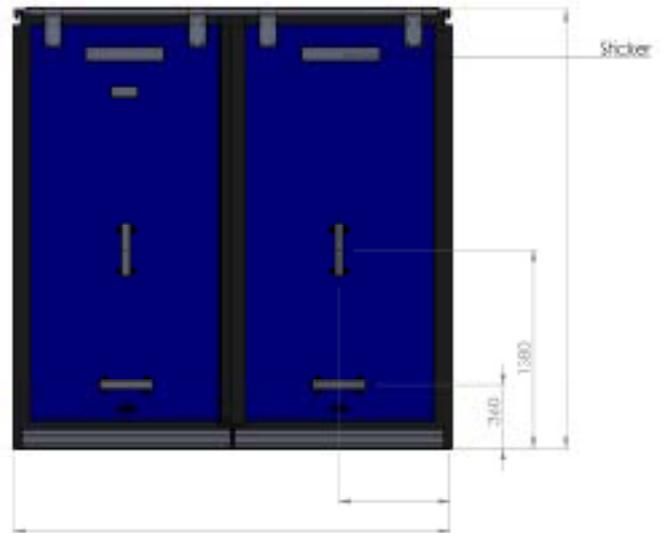

## SPECIFICATIONS

| SAP      | Insulation value        | Panel thickness | Weight | Material                                     | Dimensions   |
|----------|-------------------------|-----------------|--------|--|--|
| 10007820 | 0,38W/m <sup>2</sup> .K | 80mm            | 40 kg  | Reinforced closed cell core panels, PVC skin | Max height 2700mm,<br>Max width 2500mm<br>(other dimensions<br>available on request) |

No rights can be derived from the information provided.

## MORE INFORMATION?

Please contact your local Loadlok sales office.

For contact details see [www.loadlok.com](http://www.loadlok.com).

MEMBER OF  CARGO CONTROL COMPANY