


PRODUCT DATA SHEET

COOL38 FLEX 2FOLD U-PROFILE

The Cool38 Flex 2Fold with U-Profile is a removable bulkhead that folds in two. This bulkhead can be positioned anywhere in the trailer. The bulkhead incorporates an abrasion protective layer (U-Profile) where it comes into contact with the floor.

Cool38 Flex 2Fold will be delivered according to trailer specifications.

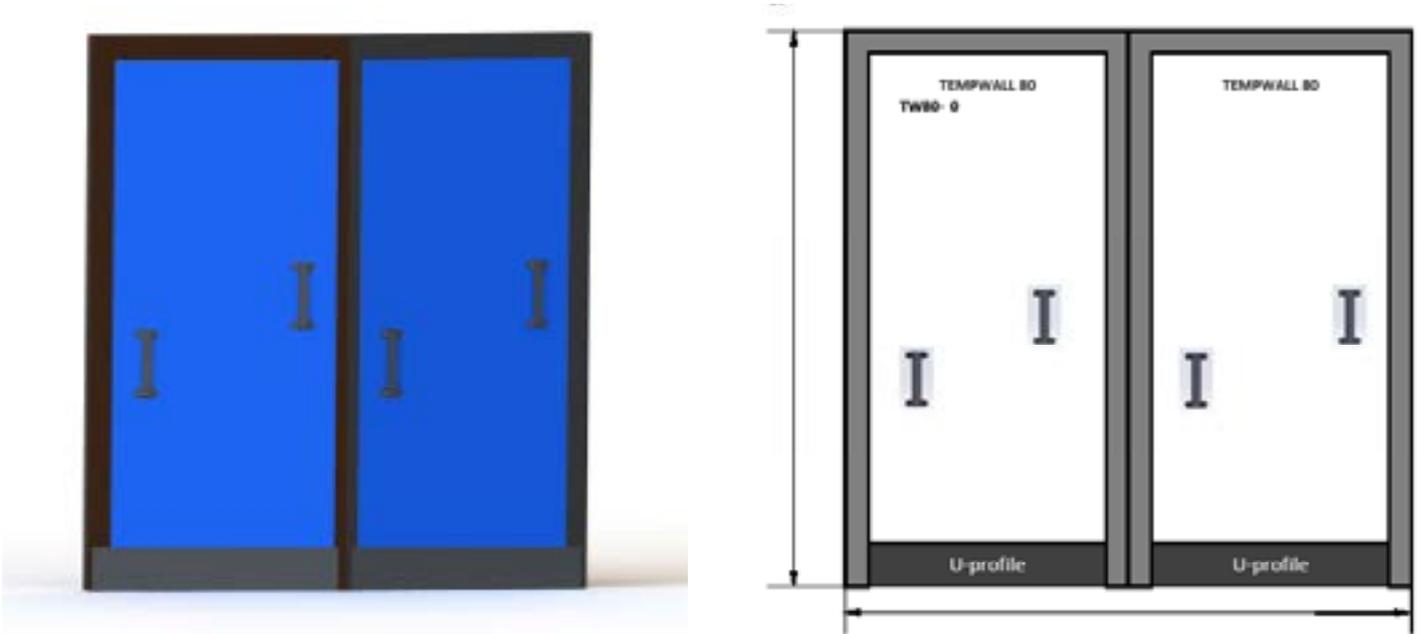

SPECIFICATIONS

SAP	Insulation value	Panel thickness	Weight	Material	Dimensions
10007744	0,38W/m ² .K	80mm	36 kg	Reinforced closed cell core panels, PVC skin	Max height 2700mm, Max width 2500mm (other dimensions available on request)

No rights can be derived from the information provided.

MORE INFORMATION?



Please contact your local Loadlok sales office.
For contact details see www.loadlok.com or
scan the QR code for a 3D Animation video.

MEMBER OF  CARGO CONTROL COMPANY